



RELIABILITY BUILT IN



T&S Brass
Japanese Foodservice
Product Catalog



T&S History and Certification

For more than 60 years, T&S Brass has been supplying foodservice establishments across the globe with quality, long-lasting, well-engineered products. The world's leading restaurants, hotels, hospitals, airports and entertainment venues rely on T&S products to meet their food-service plumbing needs. Heavy-duty construction, trustworthy performance, solid feel, and an enduring legacy of customer service and technical support means the quality of T&S Brass products is unmatched. T&S products are installed around the world.

As a leader in quality manufacturing, T&S proudly displays the certifications of the International Standardization Organization (ISO), Underwriters Laboratories (UL), and CSA International (Canadian Standards Association).

The company's ISO-9001:2008 certification is based on an evaluation of its performance of the jobs and processes that potentially affect product quality. T&S guarantees its products will be manufactured to the highest standards in the industry with the finest craftsmanship possible.



Underwriters Laboratories plays a key role in the T&S certifications to the ISO-9001:2008 standard. As the Quality Systems Registrar, UL was responsible for the entire registration process and will oversee periodic assessments to help T&S maintain its goal of exceeding customer expectations for quality manufacturing and service.

The CSA International certification T&S holds is further demonstration of the company's commitment to the needs of its customers and their communities. Following an evaluation for both the leaching of contaminants into drinking water from faucets and the mechanical quality standards, CSA International certified T&S to the ANSI/NSF Standard 61, Section 9 regulation for Drinking Water Systems (Health Effects). In short, this recognition certifies that T&S products are both safe for use within any drinking water system and adhere to the mechanical quality standards for ease of installation, operation, and reliability.



Holding certifications from three organizations recognized around the world is yet another demonstration of the T&S dedication to deliver quality to our customers around the world.

EasyInstall

EasyInstall Pre-Rinse Assemblies with "Pop and-Lock" Riser Installation makes installation easy and fast. It is a standard feature of T&S pre-rinse units.



B-0113-B EasyInstall Pre-Rinse Unit

1.42 GPM – EPA Act 2005 Compliant



- Deck-mounted single hole base faucet with "pop-and-lock" riser installation feature
- B-0107 spray valve (1.42 GPM)
- B-0044-H flexible stainless steel hose
- B-0109-01 6" (152 mm) wall bracket

Note: Universal body accepts flex lines and spreader yoke

B-0123-B EasyInstall Pre-Rinse Unit

1.42 GPM – EPA Act 2005 Compliant



- Deck-mounted base faucet with "pop-and-lock" riser installation feature
- B-0107 spray valve (1.42 GPM)
- B-0044-H flexible stainless steel hose
- B-0109-01 6" (152 mm) wall bracket

B-0133-B EasyInstall Pre-Rinse Unit

1.42 GPM – EPA Act 2005 Compliant



- 8" (203 mm) center wall-mounted faucet with "pop-and-lock" riser installation feature
- B-0107 spray valve (1.42 GPM)
- B-0044-H flexible stainless steel hose
- B-0109-01 6" (152 mm) wall bracket

B-0100-08 JeTSpray Pre-Rinse Spray Unit

1.48 GPM – EPA Act 2005 Compliant

- B-0108 JeTSpray valve
- Forged brass body
- Ergonomic design
- 3' (914 mm) stainless steel hose



B-0100-08C Low Flow JeTSpray Pre-Rinse Spray Unit

NEW FLOW RATE! 0.65 GPM – EPA Act 2005 Compliant

- Same as B-0100-08 (shown above) except with B-0108-C low flow spray valve

B-0100-C Low Flow Pre-Rinse Spray Unit

NEW FLOW RATE! 0.65 GPM – EPA Act 2005 Compliant

- B-0107-C low flow spray valve
- Flexible stainless steel hose



B-0507 Single Foot Pedal Valve

- For hot or cold water
- Floor mounted single pedal valve
- 1/2" NPT female inlet and outlet
- Includes two wood mounting screws



B-0156 Add-On Faucet For Pre-Rinse Units

- 12" (305 mm) swing nozzle with aerator
- Includes 3" nipple for installation on existing base faucets (000358-40)

Note: the B-0156 increases the height of a pre-rinse unit by approximately 4-1/2" (114 mm).



B-0109-02 Wall Bracket

- 9" (229 mm) wall bracket
- Fits 3/8" pre-rinse riser pipe




B-0101 Pre-Rinse Spray with Flexible Stainless Steel Hose

- Spray valve with rosespray outlet
- Push button automatic shut-off
- 38" (914 mm) stainless steel hose
- 1/2" NPT male inlet



B-0425-M Supply Nipple

- Two (2) supply connections






T&S Mini Pre-Rinse Units – The Perfect Solution For Limited Kitchen Space

All **T&S Mini Pre-Rinse Units** include many of the same high-quality components and features you already find with our standard-sized pre-rinse.

Customizing Made Easy

Options available for each **T&S Mini Pre-Rinse Unit** allow you to order exactly what you need.

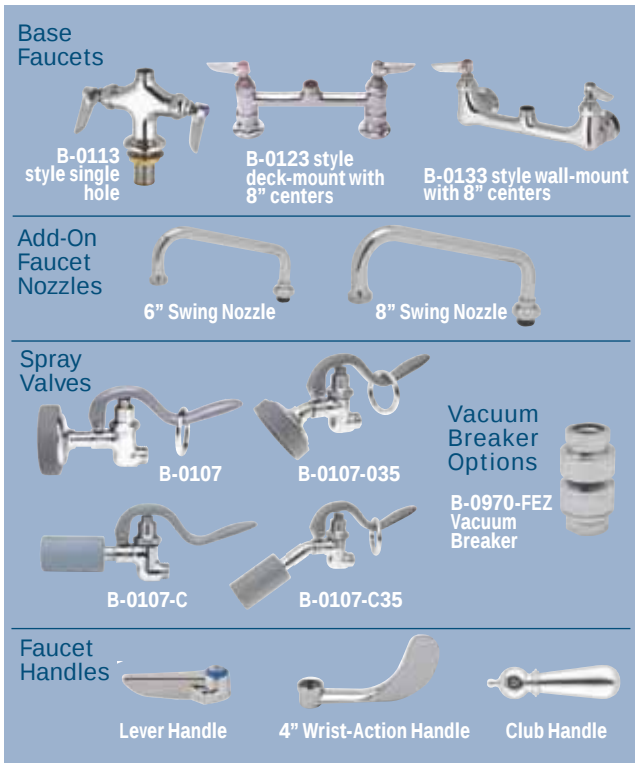

Examples of Available Models

MPY-2DCN-06 – Single deck mount base faucet, add-on faucet, 6" swing nozzle, compact spring and hose with B-0107-C spray valve, 6" wall bracket, club handles


MPZ-2DLN-06 – Single deck mount base faucet, add-on faucet, 6" swing nozzle, compact spring and hose, B-0107 spray valve, 6" wall bracket, lever handles

MPZ-8WCN-06 – 8" Wall mount mixing faucet, add-on faucet, 6" swing nozzle, compact spring and hose, B-0107 spray valve, 6" wall bracket, club handles

MPZ-8WLN-06 – 8" Wall mount mixing faucet, add-on faucet, 6" swing nozzle, compact spring and hose, B-0107 spray valve, 6" wall bracket, lever handles



Mini Pre-Rinse Unit Configurator – Build Your Own Mini Pre-Rinse!

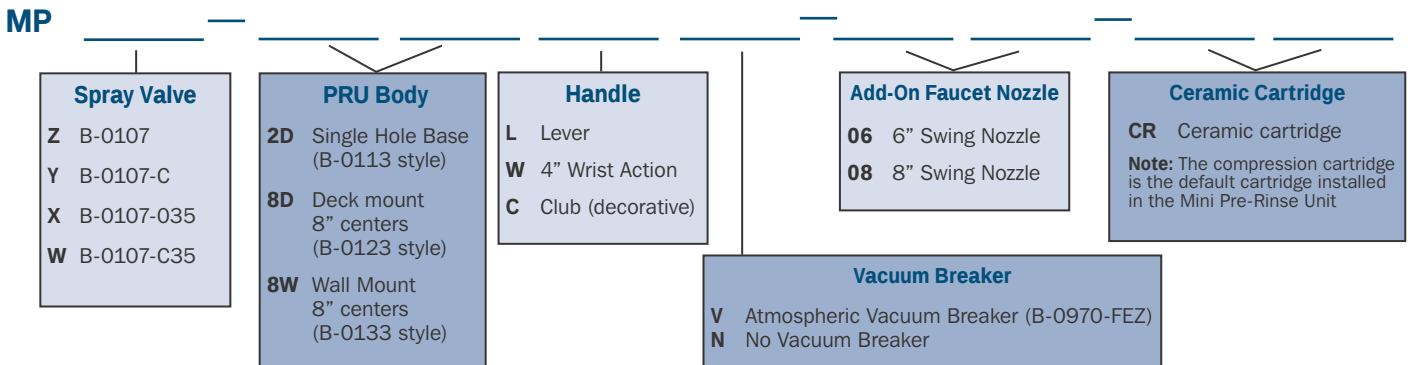

**B-1151 (shown) and B-1152
Workboard Faucet****B-1152:**

- Deck mounted faucet with 8" (203 mm) centers
- 10-1/2" (267 mm) escutcheon
- Forged brass body
- Removable seats
- 1" long shanks with 1/2" NPT threads
- 8" (203 mm) swing nozzle
- Positive diverter with protective flange
- Flexible stainless steel hose (013E-48) 48" (1219 mm) length – other lengths available
- Spray valve (002857-40)

**B-1156
Workboard Faucet**


- Splashback mounted faucet with 4" (102 mm) centers
- 6-1/2" (165 mm) escutcheon
- Forged brass body
- Removable seats
- 1" long shanks with 1/2" NPT threads
- 8" (203 mm) swing nozzle
- Positive diverter with protective flange
- Flexible stainless steel hose (013E-48) 48" (1219 mm) length – other lengths available
- Spray valve (002857-40)

**B-1171 (shown) and B-1172
Workboard Faucet****B-1172:**

- Deck mounted faucet with 8" (203 mm) centers
- 10-1/2" (267 mm) escutcheon
- Forged brass body
- Removable seats
- 1" long shanks with 1/2" NPT threads
- 8" (203 mm) swing nozzle
- Built-in diverter
- Self closing spray valve
- 4' (1.2 m) reinforced vinyl hose and guide

**B-2331
Combination Pot Filler and Spray Assemblies**

- Wall mounted mixing faucet with 8" (203 mm) centers
- 1/2" NPT female inlets
- Two in-line vacuum breakers (B-0970-FE)
- Two wall hooks (B-0166)
- Two B-0144-H flexible stainless steel hoses
- Self closing spray valve (002853-40)
- Automatic shut-off valve and hook nozzle (002851-40)
- Tee swivel
- Built-in check valve

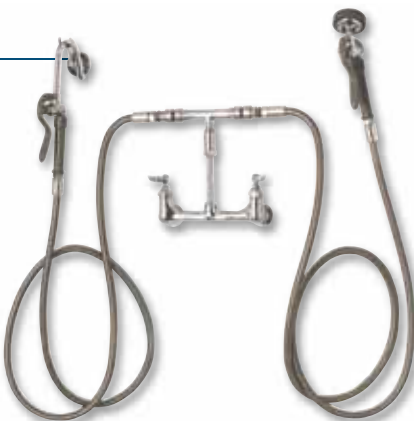

T&S Pot and Kettle Fillers are free standing, serve one to three kettles, are easy to install and clean with concealed piping.

**B-0175 and B-0176
Faucet with Swing Nozzle and Spray Unit****B-0175 – Spray valve with 1.42 GPM – EPAc 2005
Compliant**

- 8" center wall mounted mixing faucet (002832-40)
- Add-on faucet with 12" (305 mm) swing nozzle (B-0156)
- B-0104-H flexible stainless steel hose
- B-0107-035 angle spray valve with automatic shut-off
- Hanger hook holds hose when not in use
- 108" (2743 mm) overall length of hose and spray unit
- 1/2" NPT female eccentric flanged inlets (OOAA)

B-0175 – Same as B-0175 except with single hole deck mounted faucet (002824-40) with 4" (102 mm) spreader unit)

**B-0185
Kettle Filler Spout Stanchion**

- 18" (457 mm) double joint nozzle with ON-OFF control
- Single water service
- 1/2" NPT connection
- Chrome plated stanchion

**B-0190
Combination Kettle Filler and Spray Stanchion**

- Automatic shut-off valve with hook nozzle (002851-40)
- B-0144-H flexible stainless steel hose
- Self-closing spray valve (B-0107-35)
- Chrome plated stanchion
- Tee swivels
- Hook attachment for hanging hose when not in use (002852-40)
- 1/2" NPT connection
- Single water service
- 44" (1118 mm) overall height





T&S Electronic Faucets

include:

- AC/DC control module (electric plug-in and battery)
- Sensor operated faucet
- Adjustable temperature control
- Automatic timeout feature
- Chrome plated brass
- 2.2 GPM vandal-resistant aerator

EC-3100 Electronic Faucet

- Deck-mounted gooseneck



EC-3101 Electronic Faucet

- Back splash-mounted (wall-mounted) gooseneck




EC-HYDROGEN EC-3100-HG and EC-3101-HG Electronic Faucets with Hydro Generator

NEW!

NEW! -HG suffix adds water and power-saving feature to T&S electronic faucets

- 1/2 NPSM male inlet and outlet threads
- Available as accessory for existing ChekPoint faucets
- Includes generator, (1) 1/2 NPSM swivel coupling
- 71" (1800 mm) power cord with male plug to connect to control module
- Add -HG suffix to order new faucet

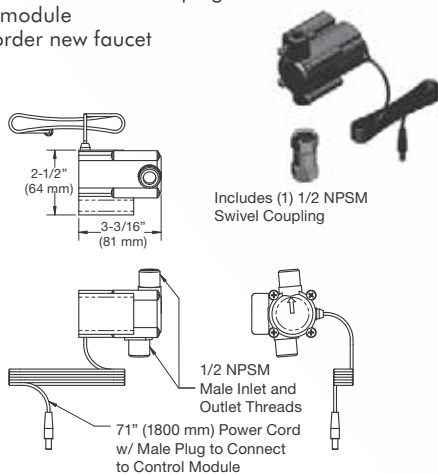

T&S Glass Fillers have a sleek new look and newly designed and improved features.

B-1205 Glass Filler

NEW!

- Wall-mounted, 3/8" NPT male outlet
- 4-7/8" (124 mm) from front of filler to wall
- Volume regulator
- Translucent blue push back arm is easier to operate
- Instantaneous shut-off



B-1210 Glass Filler

NEW!

- Deck-mounted pedestal push back glass filler
- 1/2" NPT male shank, 2" (51 mm) long
- Volume regulator
- Translucent blue push back arm is easier to operate
- Instantaneous shut-off



B-1230 Water Station

NEW!

- Glass filler water station
- 10-1/2" (267 mm) x 12-1/2" (318 mm) drip pan, one piece of 18 gauge stainless steel
- B-1210 push back glass filler
- Coupling nut and 1/4" (6 mm) sweat tailpiece for copper tube connection
- 2-1/4" diameter grid drain; includes drain tailpiece



All T&S Hose Reels include:

- Heavy-duty spray valve with heat-resistant handle
- Ratcheting system holds the length of hose until a slight tug; retracts automatically
- $\frac{3}{8}$ " NPT female inlet
- Adjustable hose bumper
- Multi-fit bracket for wall, ceiling or under counter mounting

B-7133-01 (shown) and B-7133-08H Open Retractable Hose Reel

- Open reel with stainless steel finish
- 35' (10.7 m) of heavy-duty blue hose, $\frac{1}{2}$ " I.D.

- **-01 models** – EB-0107 Spray valve
- **-08H models** – **B-0108-H** High-flow JeTSpray Valve



B-7233-01 (shown) and B-7233-08H Open Retractable Hose Reel

- Open reel with epoxy coated steel finish
- 35' (10.7 m) of heavy-duty blue hose, $\frac{1}{2}$ " I.D.

- **-01 models** – EB-0107 Spray valve
- **-08H models** – **B-0108-H** High-flow JeTSpray Valve



NOTE: See the T&S Hose Reel Installation drawings on page 8

EB-0107 Blue Spray Valve for Hose Reels (-01)

- 4.0 GPM at 60 PSI
- Connects directly to hose reel hose
- Designed for heavy use in industrial settings
- High pressure spray shuts off when handle is released




B-0108-H High-Flow JeTSpray for Hose Reels (-8H)

- Ergonomically designed spray valve
- 4.0 GPM at 60 PSI
- Connects directly to hose reel hose
- Designed for heavy use in industrial settings
- High pressure spray shuts off when handle is released



B-0963 Continuous Pressure Vacuum Breaker Assembly

- Designed for continuous pressure
- $\frac{1}{2}$ " NPT inlet and outlet
- 001359-40 adapters available for $\frac{3}{8}$ " NPT
- Order B-0963RK repair kit (not shown)




HW-4C-36 Safe-T-Link Water Appliance Connector

- 36" (914 mm) length
- $\frac{1}{2}$ " NPT thread
- Male to quick-disconnect fittings
- Welded fitting connections
- Coated stainless steel hose
- Extruded coating
- Rated to 175°F maximum



G016652-45 Hose Reel Pivot Mounting Bracket



- Epoxy coated steel
- Fits all T&S hose reels
- Multi-fit bracket for wall, ceiling or under counter mounting



G016737-45 Hose Reel Swing Mounting Bracket

- Epoxy coated steel
- Fits all 50' T&S hose reels
- Multi-fit bracket for wall, ceiling or under counter mounting



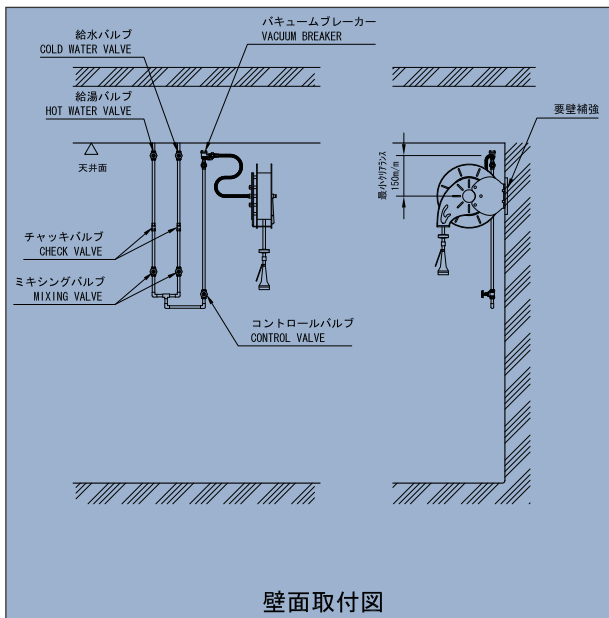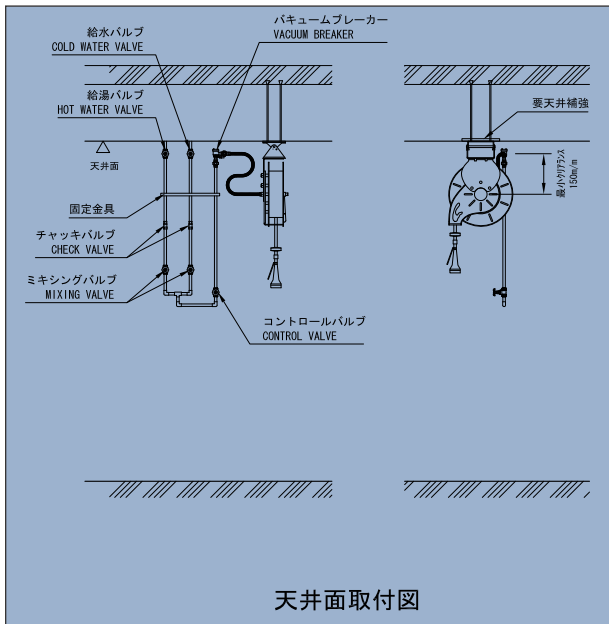

NOTE: See page 7 for T&S Hose Reel models for this installation



B-3940 Twist Rotary Waste Valves

- Drain adapter reduces 2" drain outlet to 1-1/2" outlet
- Valve bodies come standard with 2" outlet
- 3" (76 mm) or 3-1/2" (89 mm) sink opening applications
- Add "-01" to model for overflow assembly



B-3960 Lever Waste Valves

- Drain adapter reduces 2" drain outlet to 1-1/2" outlet
- Valve bodies come standard with 2" outlet
- 3" (76 mm) or 3-1/2" (89 mm) sink opening applications
- Add "-01" to model for overflow assembly




B-0580 Pot Filler

- Wall mounted, 18" (457 mm) double joint nozzle (002848-40)
- 1/2" NPT female inlet
- Adjustable flange
- Insulated on-off volume control grip on tip of nozzle (035A)



B-0590 Pot Filler Faucet

- Deck mounted, single control with 18" (457 mm) double joint nozzle (002848-40)
- 1/2" NPT female inlet
- Insulated on-off volume control grip on tip of nozzle (035A)

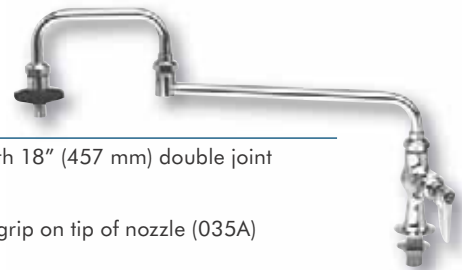

RELIABILITY BUILT IN™

www.tsbrass.com

T&S Brass and Bronze Works, Inc • 2 Saddleback Cove • P.O. Box 1088 • Travelers Rest, SC 29690
Phone (800) 476-4103 • Fax (800) 868-0084 • E-mail: tsbrass@tsbrass.com